This data supercedes all previous data. Last Updated 5/17/2016



Barrier Fence






Earth Savers barrier fence is a superior quality construction fence us in and around jobsites to delineate work zones. It is also an accepted product to visibly mark boundaries adjacent to environmentally protected areas.

Typical Properties	Test Method	Typical Values	
		English	Metric
Tensile Strength YLD MD	ASTM-4882	2817 PSI	191 kgf/cm²
Tensile Strength YLD TD	ASTM-4882	3483 PSI	245 kgf/cm ²
Tensile Strength Load BRK MD	ASTM-4595	225 lb/ft	335 kg/m
Tensile Strength Load BRK TD	ASTM-4596	125 lb/ft	186 kg/m
Elongation Load BRK MD	ASTM-D882	6.7%	
Elongation Load BRK TD	ASTM-D883	183%	
Roll Size		4 ft x 100 ft	1.2m x 30.5m
Mesh Size		2 in x 2 in	5 cm x 5 cm
Material		Polypropylene	
Color		High Visibility Orange or Green	
Ultra Violet Resistance		Fully Stabilized	

^{**} Testing Methods Used: ASTM D882 Provided by: Total Petrochemical USA -- ASTM D618/ ASTM D4595 Provided by: CRT Laboratories, UL Registerd - ISO & ISO-IEC Certified **

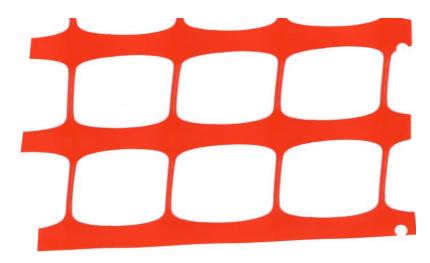







Disclaimer: EarthSaver assumes no liability for the completeness or accuracy of this information. EarthSavers disclaims any and all implied, expressed or statutory standards, guarantees or warranties. This document should not be considered engineering advice. Always consult the project engineer for specific requirements. The end user assumes sole responsibility for the use of this information and product. The material property values listed above are subject to change without notice.

www.earth-savers.com
PO Box 2083 Woodland CA, 95776 ● Toll Free (866) WATTLES ● Fax (530) 668-5140

dco copyright 2014